

○ PA-2000A / PA-4000A / PA-6000A:
60W, 120W, 240W Mixer Amplifiers


Ground breaking amplifier series which, when released, set new standards in the industry, its modern outlook and host of features pushed it to the forefront of the PA, education, AV and church markets, where it remains today!

Features:

- 6 Inputs (5 x 3 pin XLR, 1 x stereo phono)
- Telephone input (screw terminals)
- Priority-telephone, mic 1, mic 2
- 5 Band graphic equaliser
- Line in
- Line out
- 5 Zone speaker selection
- Chime~siren
- External mute terminal
- Bar graph LED output VU meter
- 3U high
- Optional 19" rack kits (BKT-PA2000A, BKT-PA4000A*)

* Bracket also fits PA6000A

○ 19" Rack Mount Bracket Options:

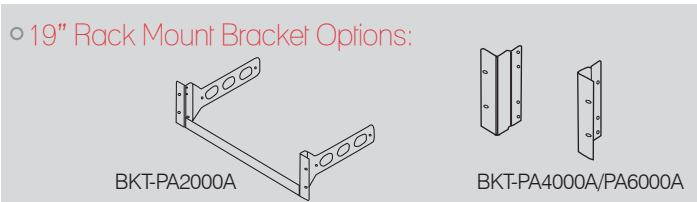

Specifications:

Model:	PA-2000A:	PA-4000A:	PA-6000A:
Output Power	60W RMS @ 100v/70v 60W RMS @ 8W/4W	120W RMS @ 100v/70v 120W RMS @ 8W/4W	240W RMS @ 100v/70v 240W RMS @ 8W/4W
Inputs	5 x Mic/line (3 pin XLR~F) 1 x Mix/Aux (stereo phono) 1 x Telephone (screw terminal)	5 x Mic/line (3 pin XLR~F) 1 x Mix/Aux (stereo phono) 1 x Telephone (screw terminal)	5 x Mic/line (3 pin XLR~F) 1 x Mix/Aux (stereo phono) 1 x Telephone (screw terminal)
Priority	Telephone, Mic 1, Mic 2	Telephone, Mic 1, Mic 2	Telephone, Mic 1, Mic 2
Input Sensitivity/Impedance	Inputs 1~6~1mV / 10kV Telephone~-2dB/600W	Inputs 1~6~1mV / 10kV Telephone~-2dB/600W	Inputs 1~6~1mV / 10kV Telephone~-2dB/600W
Frequency Response	60Hz~20KHz	60Hz~20KHz	60Hz~20KHz
Link in/out	In: 0dB/47kΩ Out: -6dB/600Ω	In: 0dB/47kΩ Out: -6dB/600Ω	In: 0dB/47kΩ Out: -6dB/600Ω
Power Requirement	230v AC 50Hz	230v AC 50Hz	230v AC 50Hz
Dimensions	420(W) x 100(H) x 320(D)mm	420(W) x 133(H) x 320(D)mm	420(W) x 133(H) x 320(D)mm
Weight	10kg	12kg	13.5kg

